



1) Ignition coils

Disconnect black connector (6way) placed above cylinder head on the left side - pic.1
Insert QS wiring harness - see picture below - pic.2

2) Ground connection

Connect black wire of QS wiring harness to negative terminal of battery (or to frame of motorcycle)


3) QS sensor

Connect QS sensor to QS wiring harness - black 2 pin connector.



Pic.1 - location of 6way connector from Ignition coils

Pic.2 - female connector to main wiring harness

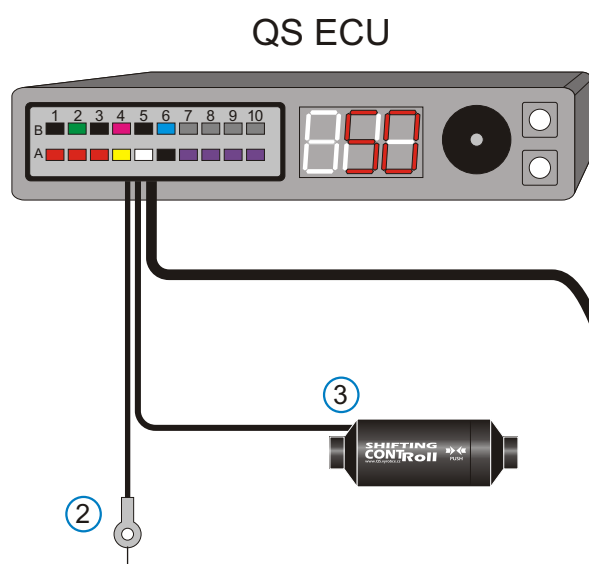

1

3

2



Male connector to ignition coils